

TITAN™

Advanced Performance. Total Reliability.

Full Line Catalog



TITAN[™] CAPSPRAY[®]

TITAN[™] SPEEDFLO[®]

THE POWER OF

TITAN[™]

Advanced Performance. Total Reliability.

The Power Of Titan

ADVANCED PERFORMANCE

- TITAN sprayers are designed BY professionals FOR contractors
- Our sprayers are built to work hard, live long and deliver a perfect finish every time
- The latest engineering technology ensures ease of use and dependability, keeping contractors on the job
- Our sprayers exceed the expectations of contractors who want to do the job right the FIRST time

TOTAL RELIABILITY

- Proven technology - you finish every job quickly and profitably
- Superior design and construction maximizes the service life of your sprayer
- Complete diversity of equipment – we have a sprayer for every application
- Half a century of getting the job done right – TITAN is the name you trust

UNSURPASSED SERVICE

- Dependable, reliable network of authorized sales and service distributors
- Customer service you can rely on to help you select and maintain your sprayer
- Professional application and service representatives ready to assist you with recommendations and technical support

Residential



Commercial



Line Striping



CAPSPRAY®



Capspray 8500

The Capspray 8500 is a powerful and versatile turbine unit, spraying a wide range of coatings. Sprays stain to finish quality latex. Rugged, portable and dependable as you would expect.

Air Pressure:	0.6 bar (8.5 PSI)
Turbine:	4-stage tangential
Hose Length:	9 m (30 ft.)
Weight:	10 kg (22.5 Lbs.)
Gun Included:	Maxum II

Maxum II Gun



Recognized as the finest HVLP gun available today.

CAPSPRAY - the number one selling HVLP in the industry continues to offer the highest level of performance and control.

When dependable means profitable

Contractors working to build their business look for the best value for their hard-earned dollars. That's why we created the TITAN PERFORMANCE Series: they deliver solid sprayer performance at a price that any contractor can afford.

- Exclusive DCX Motor and Brushless PMDC sealed and protected from overspray
- Long Life Motor
- Sleeveless fluid section minimizes repair costs
- Time tested, painter proven fluid section

Brushless Motor




Never wears, never needs replacing

Lifetime Cylinder



Minimize repair time and costs. No cylinder replacement ever!

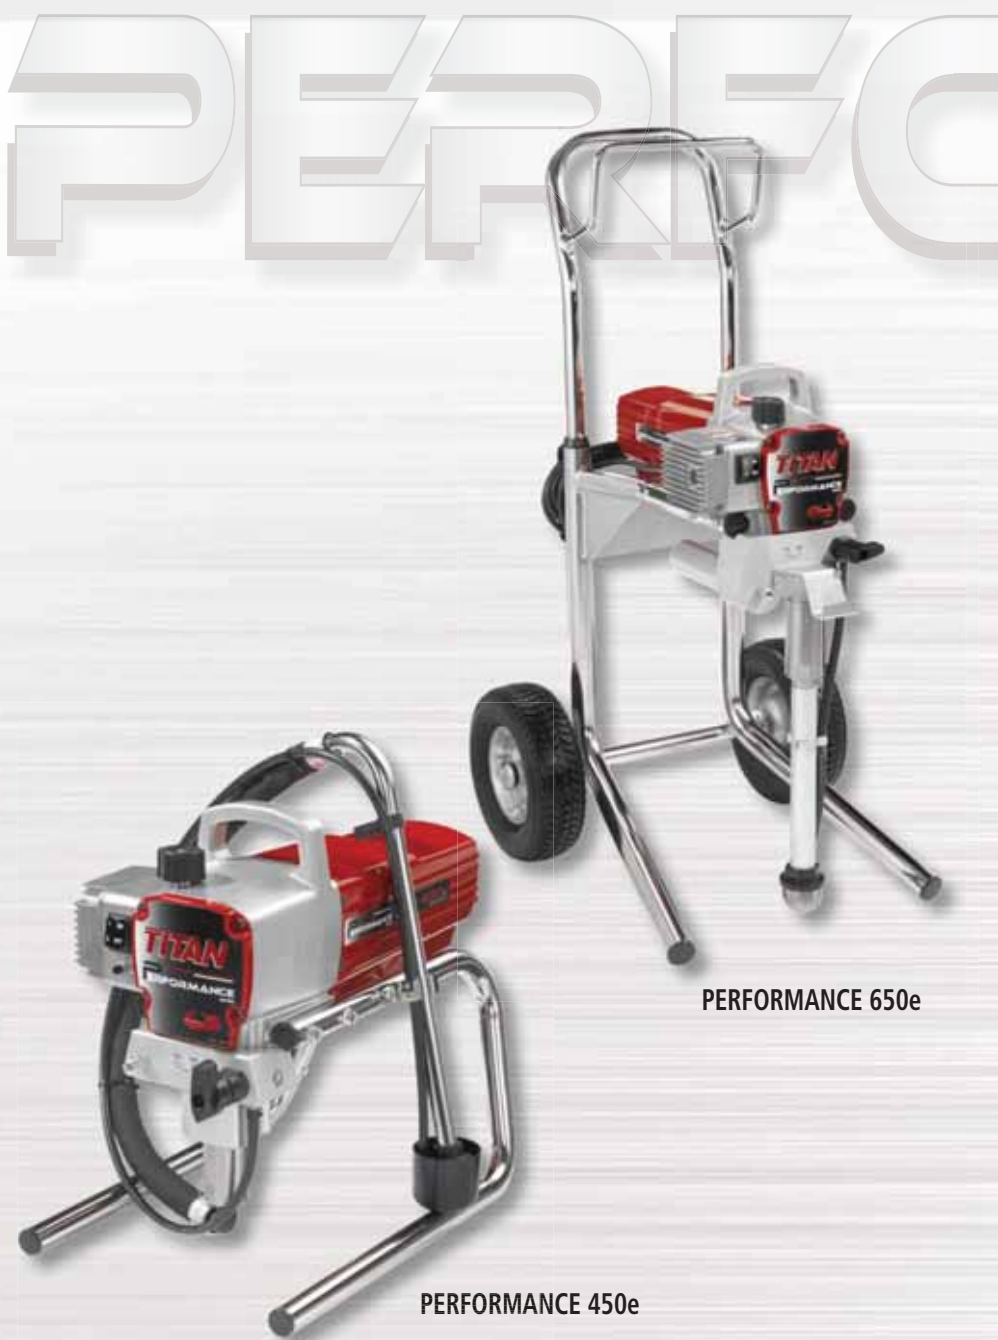

PERFORMANCE 650e

PERFORMANCE 450e

All units come complete with LX80^{II} gun, tip & hose.

PERFORMANCE 450e

The new PERFORMANCE 450e was designed to minimize size and weight and maximize performance. The PERFORMANCE 450e delivers the highest performance in this size. It is excellent for residential and smaller commercial jobs.

Max. Delivery	1.8 l/min (0.47 GPM)
Max. Tip Size	.021" tip
Max Operating Pressure	214 bar (3100 PSI)
Weight (high rider)	
Weight (skid)	15.2 kg (33.5 lbs.)
Motor	0.83 kW DCX (1.1 hp)
Voltage/Amp.	230V / 6.0A 110V / 11.5A

PERFORMANCE 650e

The PERFORMANCE 650e is the perfect sprayer for residential repaints and smaller commercial jobs. It's the ideal one-man sprayer. Sprays all coatings, from stains and sealers to enamel, latex and light elastomerics.

Max. Delivery	2.3 l/min (0.60 GPM)
Max. Tip Size	.024" tip
Max Operating Pressure	214 bar (3100 PSI)
Weight (high rider)	24.8 kg (54.6 lbs.)
Weight (skid)	17.8 kg (39.3 lbs.)
Motor	1.0 kW DCX (1.35 hp)
Voltage/Amp.	230V / 5.7A 110V / 12.5A

PERFORMANCE



PERFORMANCE 850e

PERFORMANCE 1150e

PERFORMANCE 750e

Rugged heavy-duty
cart assemblies in upright
configurations.

PERFORMANCE 750e

Versatility and higher output deliver performance unparalleled in the class! Sprays stains, lacquers, epoxies, latex and block fillers.

Max. Delivery	2.7 l/min (0.70 GPM)
Max. Tip Size	.027" tip
Max Operating Pressure	214 bar (3100 PSI)
Weight (high rider)	29.5 kg (65 lbs.)
Weight (skid)	21.2 kg (46.8 lbs.)
Motor	1.2 kW PMDC Brushless
Voltage/Amp.	230V / 6.5A 110V / 13.1A

PERFORMANCE 850e

Multiple gun unit, delivering performance and functionality! Sprays stains, lacquers, epoxies, latex, dry fall and block fillers.

Max. Delivery	3.2 l/min (0.85 GPM)
Max. Tip Size	.029" tip
Max Operating Pressure	214 bar (3100 PSI)
Weight (high rider)	40 kg (88.0 lbs.)
Motor	1.4 kW PMDC Brushless
Voltage/Amp.	230V / 4.6A 110V / 13.0A

PERFORMANCE 1150e

The PERFORMANCE 1150e is designed to be used everyday on all residential, industrial and commercial applications. This unit sprays all materials from stains, lacquer, enamel, latex, epoxies, block fillers and elastomerics.

Max. Delivery	4.4 l/min (1.15 GPM)
Max. Tip Size	1 Gun .033" tip 2 Guns .021" tip
Max Operating Pressure	214 bar (3100 PSI)
Weight (high rider)	47.6 kg (105 lbs.)
Motor	1.6 kW PMDC Brushless
Voltage/Amp.	230V / 7.85A 110V / 13.5A

TITAN™ ADVANTAGE® GPX™ SERIES

For contractors who want a durable and affordable petrol-powered sprayer

GPX sprayers have a reputation for simple, rugged reliability other brands can only envy. Pound for pound, GPX sprayers offer more power and value than any petrol-powered sprayer in their class.

- Compact cart design for easy maneuverability
- Most powerful HP to LPM ratio
- Easy-starting, fuel efficient Robin-Subaru overhead cam engine
- Static packings for increased packing life

OHC Engine



Proven — Overhead cam engines have greater fuel efficiency than overhead valve engines

Packings



Static packings for increased packing life



All units come complete with gun, tip & hose.

ADVANTAGE GPX 85

The GPX 85 is ideally suited for new construction and repaints where electricity is not readily available. Spray most architectural and industrial coatings with this high performance, petrol-powered airless sprayer.

Max. Delivery:	3.2 l/min (0.85 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	1 Gun .030" tip 2 Guns .021" tip
Engine:	3.3 kW Subaru, 123 cc (4.5 HP)
High Rider:	0509036

ADVANTAGE GPX 130

The GPX 130 is a production sprayer capable of supporting large tips and multiple guns on big jobs. A powerful 6.0 HP Subaru petrol engine provides plenty of power for spraying most heavy architectural coatings, block fillers and epoxies.

Max. Delivery:	5 l/min (1.30 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	1 Gun .035" tip 2 Guns .025" tip 3 Guns .017" tip
Engine:	4.4 kW Subaru, 169 cc (6.0 HP)
High Rider:	0509038



ADVANTAGE GPX 165

The GPX 165 includes a warranty to reduce downtime, fully pneumatic tyres for easy construction site transporting, and large porting so you can spray high-viscosity coatings. You get all of this at an affordable price!

Max. Delivery:	6.3 l/min (1.65 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	1 Gun .042" tip
	2 Guns .029" tip
	3 Guns .023" tip
	4 Guns .017" tip
Engine:	5 kW Subaru, 211 cc (7.0 HP)
High Rider:	0509039

ADVANTAGE GPX 220

A heavy-duty workhorse with more power than any other sprayer in its class, the GPX 220 is recommended for large and medium interior and exterior coating projects where large tips or multiple guns may be required.

Max. Delivery:	8.3 l/min (2.20 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	1 Gun .049" tip
	2 Guns .035" tip
	3 Guns .027" tip
	4 Guns .023" tip
Engine:	5 kW Subaru, 211 cc (7.0 HP)
High Rider:	0509023

TITAN™ SPEEFLO® POWRTWIN® SERIES

A workhorse that is now a legend among contractors

Since their introduction over 25 years ago, PowrTwin hydraulic piston sprayers have a well-earned reputation for durability and dependability among serious contractors for large scale residential, commercial and industrial applications.

- Slow-stroking hydraulic piston maximizes fluid section life
- Converts from petrol power to electric quickly and easily
- Accurate pressure from 400 to 3300 psi

HydraDrive™



*Proven, Reliable,
Smooth,
Slow-Stroking
Hydraulic Drive
Eliminates Gears
and Clutches*

Speeflo Hydraulic Pump



*Runs 20%
cooler with no
clutch to wear
and no routine
maintenance*



PowrTwin 6900 XLT

PowrTwin 4900 XLT

All units come complete with gun, tip & hose.

PowrTwin 4900 XLT

The perfect hydraulic sprayer for contractors working on small to medium scale residential and commercial projects.

Max. Delivery (Gas):	4.7 l/min (1.25 GPM)
Max. Delivery (Electric):	4.7 l/min (1.25 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size (Gas):	1 Gun .036" tip 2 Guns .028" tip
Max. Tip Size (Electric):	1 Gun .031" tip 2 Guns .023" tip
Engine:	2.6 kW Honda GX120, 120 cc (3.5 hp)
P/N:	335-315
230V (Electric)	448-325

PowrTwin 6900 XLT

The perfect hydraulic sprayer for contractors working on medium to large scale residential & commercial projects.

Max. Delivery (Gas):	8 l/min (2.15 GPM)
Max. Delivery (Electric):	4.7 l/min (1.25 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size (Gas):	1 Gun .048" tip 2 Guns .033" tip
Max. Tip Size (Electric):	2 Gun .033" tip 2 Guns .026" tip
Engine:	3.6 kW Honda GX160, 160 cc (4.8 hp)
P/N:	448-315
230V (Electric)	448-325

PowrTwin 8900 XLT

A workhorse hydraulic sprayer for contractors working on large scale residential, commercial & industrial projects.

Max. Delivery (Gas):	9 l/min (2.35 GPM)
Max. Delivery (Electric):	4.7 l/min (1.25 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size (Gas) :	1 Gun .052" tip 2 Guns .038" tip
Max. Tip Size (Electric):	1 Gun .036" tip 2 Gun .026" tip
Engine:	5 kW Honda GX200, 200 cc (6.5 hp)
P/N:	449-315

PowrTwin 12000 XLT

PowrTwin 6900
XLT DI

PowrTwin 8900 XLT



PowrTwin 12000 XLT DI

**PowrTwin 12000XLT**

A powerhouse hydraulic sprayer recommended for very large scale residential, commercial & industrial projects where up to 6 guns are needed.

Max. Delivery (Gas):	12 l/min (3.15 GPM)
Max. Delivery (Electric):	4.7 l/min (1.25 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size (Gas):	1 Gun .058" tip 2 Guns .040" tip
Max. Tip Size (Electric):	1 Gun .036" tip 2 Guns .026" tip
Engine:	6 kW Honda GX270, 270 cc (8.0 hp)
P/N:	459-315

PowrTwin 6900 XLT DI

Configured with a submersible foot valve designed for very heavy materials, including drywall mud.

Max. Delivery (Gas):	8 l/min (2.15 GPM)
Max. Delivery (Electric):	4,7 l/min (1.25 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size (Gas):	1 Gun .048" tip 2 Guns .033" tip
Max. Tip Size (Electric):	1 Gun .036" tip 2 Guns .026" tip
Engine:	3,6 kW Honda GX160, 160 cc (4.8 hp)
P/N:	448-360
230V Electric	448-370

PowrTwin 12000 XLT DI

The flagship of the line and is recommended for very large scale projects where up to 6 guns may be needed, or application of very heavy coatings.

Max. Delivery (Gas):	12 l/min (3.15 GPM)
Max. Delivery (Electric):	4,7 l/min (1.25 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size (Gas):	1 Gun .058" tip 2 Guns .040" tip
Max. Tip Size (Electric):	1 Gun .036" tip 2 Guns .026" tip
Engine:	6 kW Honda GX270, 270 cc (8.0 hp)
Engine:	Honda® GX 270 (270 cc, 8.0 hp)

TITAN™ SPEEFLO® HYDRA™ SERIES

Maximum pressure and power for challenging jobs

Bridges, water tanks, roofing, foundations and other large projects require the kind of hydraulic piston power only a Hydra can deliver. It is the ultimate sprayer for any job where maximum power is required and dependability is critical.

- Slow-stroking hydraulic piston maximizes fluid section life
- Designed for ultra-heavy coatings including mastics, waterproofing and roof coatings.

Roofing



High production unit for all achitctural caotings including epoxies and roof coatings

Single Membrane Coatings



Extra pressure for hard to atomize coatings such as bonding cements for single membrane coatings



Hydra Pro IV

Hydra M 4000

Hydra M
55 gallon remote

Hydra M 2000

Hydra Pro IV

High production unit for all architectural coatings, dry wall mud, epoxies, most mastics and elasomeric roof coatings.

Max. Flow:	9.5 l/min (2.5 GPM)
Max. Operating Pressure:	230 bar (3300 PSI)
Max. Tip Size:	.050" tip
Cycles per Gallon:	75 (20)
Gas Engine:	6 kW Honda GX270, 270 cc (8 HP)
Siphon Model:	433-820

Hydra M 4000

High production unit for very high viscosity materials. Extra pressure for hard to atomize material or long hoses.

Max. Flow:	12.5 l/min (3.3 GPM)
Max. Operating Pressure:	280 bar (4000 PSI)
Max. Tip Size:	.060" tip
Cycles per Gallon:	50 (13)
Gas Engine:	8 kW Honda GX390, 390 cc (11HP)
Siphon Model:	433-801
55 Gal Remote:	433-802

Hydra M 2000

High production roof coating sprayer available with siphon hose or 55 gallon immersion remote.

Max. Flow:	23 l/min (6.0 GPM)
Max. Operating Pressure:	140 bar (2000 PSI)
Max. Tip Size:	.075" tip
Cycles per Gallon:	28 (7)
Gas Engine:	8 kW Honda GX390, 390 cc (11HP)
Siphon Model:	433-860
55 Gal Remote:	433-861

TITAN™ SPEEFLO®

AIR POWERED SPRAYERS

Proven performance for all applications and projects

Where an electric or petrol powered sprayer is not practical, contractors turn to Air Powered sprayers. Operated by compressed air, these are perfect for applying low-VOC and abrasive coatings in any situation.

- High efficiency design for maximum output
- Non-icing motor ensures continuous operation
- Maximum durability construction with hard chrome surfaces
- Spool valve design with only five moving parts

Air Motor



Maximum output per cubic foot of air input. Continuous operation without icing even at high cycle rates.

Maximum Durability



Wear surfaces are hard chromed steel or hard coat anodized aluminum.

Commander 45:1



Admiral 40:1



	Commander 45:1	Commander 60:1	Admiral 30:1	Admiral 40:1	Admiral 60:1
Delivery (GPM):	10 l/min (2.6 GPM)	7.5 l/min (2.0 GPM)	23 l/min (6.0 GPM)	15 l/min (4.0 GPM)	10 l/min (2.6 GPM)
Cycle per Liter (Gallon)	114 (30)	150 (40)	50 (13)	76 (20)	114 (30)
Max Tip Size @ 140 bar (2000 psi)	.047" tip	.043" tip	.072" tip	.057" tip	.047" tip
Pressure Ratio	'45:1	'60:1	'30:1	'40:1	'60:1
Max Pressure	310 bar (4500 PSI)	415 bar (6000 PSI)	200 bar (3000 PSI)	280 bar (4000 PSI)	415 bar (6000 PSI)
Cart Mount:	721-440	761-411	830-451	941-441	860-451
Wall Mount:	721-331	761-301	830-331		

TITAN™ SPEEFLO®

POWRLINER™ SERIES

An industry leader with a line striper for every application

Whether it's a municipal athletic field or an international airport, TITAN offers a line striper for every application. PowrLiners are built for precise, consistent line striping without fuzzy, uneven lines that result from conventional air spray systems.

- Versatile configurations let you stripe both pavement and athletic fields
- User friendly design is easy to operate and maneuver

Engine Controls



Engine controls in easy reach of the operator.

HydraDrive™



Proven Reliable, Smooth, Slow-Stroking Hydraulic Drive Eliminates Gears and Clutches



PowrLiner 800

PowrLiner 2800M

PowrLiner 1800M

PowrLiner 800

The PowrLiner 800 is perfect for entry level contractors who need a basic line striper capable of higher spraying pressures for smaller jobs on pavement, grass or turf.

Max. Delivery:	1.3 l/min (0.33 GPM)
Max. Fluid Pressure:	170 bar (2500 PSI)
Max. Tip Size:	.021" tip
Engine:	1.2 kW Subaru OHV, 34 cc (1.6 HP)
P/N:	759-091

PowrLiner 1800M

The PowrLiner 1800M is a simplified, lower GPM version of the PowrLiner 2800M that is perfect for entry level contractors who need a line striper for smaller jobs on pavement, fields or turf.

Max. Delivery:	2 l/min (0.5 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	.023" tip
Engine:	3 kW Subaru, 126 cc (4.3 HP)
P/N:	759-191

PowrLiner 2800M

The PowrLiner 2800M has greater paint output, a slower cycle rate and a cart configuration that is compact and highly maneuverable. It is ideal for smaller and medium projects.

Max. Delivery:	3.2 l/min (0.85 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	.030" tip
Engine:	3 kW Subaru, 126 cc (4.3 HP)
P/N:	759-0291



PowrLiner 4900 XLT



PowrLiner 6900 XLT



PowrLiner 8900 XLT



PowrLiner 9900 XLT

PowrLiner 4900 XLT

Recommended for Medium to Large-Scale Projects on Airports, Roads, Parking Lots and Athletic Fields.

Max. Delivery:	4.7 l/min (1.25 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	1 Gun .036" tip 2 Guns .028" tip
Engine:	2.6 kW Honda GX120, 120 cc (3.5 HP)
2 guns:	759-493

PowrLiner 6900 XLT

Recommended for Large-Scale Projects on Airports, Roads, Parking Lots and Athletic Fields.

Max. Delivery:	8 l/min (2.15 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	1 Gun .048" tip 2 Guns .033" tip
Engine:	3.5 kW Honda GX160, 160 cc (4.8 HP)
2 guns:	759-693

PowrLiner 8900 XLT

Recommended for Very Large-Scale Projects on Airports, Roads, Parking Lots and Athletic Fields.

Max. Delivery:	9 l/min (2.35 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	1 Gun .052" tip 2 Guns .038" tip
Engine:	3.5 kW Honda GX160, 160 cc (4.8 HP)
2 guns:	759-893

PowrLiner 9900 XLT

Recommended for Large-Scale Projects on Airports, Roads, Parking Lots and Athletic Fields. Wheeled Operator Seat with No-Skid Deck has room for additional 5-gallon paint pail.

Max. Delivery:	9 l/min (2.35 GPM)
Max. Fluid Pressure:	230 bar (3300 PSI)
Max. Tip Size:	1 Gun .052" tip 2 Guns .038" tip
Engine:	5.2 kW Honda GX240, 240 cc (7.1 HP)
2 guns:	759-990

TITAN™ AIRLESS GUNS

TITAN is an industry leader in sprayer gun technology

Countless hours of research and development have been devoted to manufacturing a full line of the best quality TITAN airless guns for every application imaginable - from the thinnest lacquers to the heaviest textures and roof coatings.

- Designed to minimize hand fatigue
- Solid, safe construction
- Precision trigger for accurate delivery

Residential



Commercial



LX-80" Airless Gun

Product No. 580-100A (4 Finger Trigger)

Product No. 581-085 (2 Finger Trigger)

4 Finger Gun Hose Tip Kit 580-050

2 Finger Gun Hose Tip Kit 581-150



LX-80 Platinum Series

Gun 584-100

Gun Hose Tip Kit 584-050



S-3 Series

Gun 550-250

Gun Hose Tip Kit 550-460



S-5 Series

Gun 550-100

Gun Hose Tip Kit 550-110



S-7 Series

1/4" Swivel Product No. 550-260

3/8" Swivel Product No. 550-270



- Available on 4 finger trigger or 2 finger trigger.
- All metal construction.
- Tungsten carbide ball valve, seat & stainless steel swivel insures long life & durability.
- Pressure rated at 3600 PSI (25 MPa).

- In-handle filter reduces clogging & increases tip life.
- Swivel reduces hose kinks & assures effortless control.
- Includes 517 SC-6 reversible tip.
- Lightweight, only 20 ounces (0.63 kg).

- Unique two-piece seal assembly design allows removal of just the ball for easy maintenance.
- Ultra-light trigger pull & form fitting handle reduces hand fatigue.
- Reversible tungsten carbide seat offers twice the life of standard diffusers.

- All metal construction.
- Pressure rated at 3600 PSI (25 MPa).
- Swivel reduces hose kinks.
- In-handle filter helps reduce tip clogs & increase tip life.
- Includes 517 SC-6 reversible tip.

- Stainless steel fluid passages.
- Tungsten carbide ball valve & seat ensures long life & durability.
- Easy 4 finger trigger pull.
- Includes 517 SC-6 reversible tip.
- Pressure rated at 3900 PSI (27 MPa).

- 1/4" Swivel reduces hose kinks.

- All metal construction.
- Stainless steel fluid passages.
- Tungsten carbide ball valve & seat ensures long life & durability.
- Pressure rated at 5000 PSI (34.5 MPa).

- Includes 517 SC-6 reversible tip.
- Easy 2 finger trigger pull.
- Front feed, filterless design for heavy coatings.

- Stainless steel fluid passages.
- Available in two swivel sizes for less restriction.
- Tungsten carbide ball valve & seat insures long life & durability.
- Easy 4 finger trigger pull.
- Pressure rated at 7700 PSI (53 MPa).

- Includes 517 heavy-duty reversible tip.
- Swivel reduces hose kinks.

Contractors know the quality of a spray tip can make or break a project

That is why smart contractors don't take a chance on cheap tips that wear out quickly, waste coatings and deliver an uneven finish. TITAN airless tips are renowned in the industry for their strength, durability and long life.

- Highest quality tungsten carbide. Precision machined for a perfect fan pattern
- No feathering or spitting
- Solvent proof seal

Residential




Commercial



SC-6 Reversible Tip

Applications

- Buildings / Houses
- Bridges
- Tanks



Product no. 661-XXX

WideSpray™ Tip

Applications

- Commercial Buildings
- Warehouses
- Track Housing



Product no. 661-XXXX

SYNERGY™ Tip

Applications

- Cabinets
- Shutters / Doors
- Trimwork



Product no. 671-XXX

Line Striping Tip

Applications

- Parking Lots
- Sports Fields
- Athletic Courts/Fields



Product no. 665-XXXX

High Pressure Tip

Applications

- Bridges
- Ship yards
- Watertowers



Product no. 721-XXX

Flat Tip

Applications

- Ship Yards
- Houses
- Roofing



Product no. 002-XXX

Adjustable Self Cleaning Tip

Applications

- Commercial Buildings
- Houses
- Ship Yards



Product no. 341-XXX

Features & Benefits

- New ergonomic design assures comfort when rotating to spray or reverse position for cleaning.
- Exclusive flow indicator indicates that tip is in spray or clean position.
- Highest quality tungsten carbide assures longest life, durability, and fewer passes for better coverage.

Available in the following popular sizes: (and many more)

211	311	411	513	615	715
213	313	413	515	617	717
215	315	415	517	619	719
217	317	417	519	621	721
219	319	419	521	623	723
221	321	421	523	625	725
223	323	423	525	633	733

- Perfect for high production applications.
- Increase production up to 100%.
- Widespray will save you time and money.

Available in the following sizes:

1219	1223	1227	1231	1235
1221	1225	1229	1233	1237

- Particle size up to 27% smaller than a standard tip.
- Interchangeable with industry standard safety guards.
- Ideal for lacquers, stains, and clear coats.
- Increased transfer efficiency.

Available in the following sizes:

208	210	212	214
308	310	312	314
408	410	412	414
	510	512	
		612	

- The SC-6™ Reversible Striping Tip used with the proper spraying pressure and speed, virtually eliminates jagged lines caused by excessive edge paint.
- Features Titan's proprietary "Extended Life" tungsten carbide proven to outlast competitive tips by 20%.
- Each tip is precision ground to apply paint at an even mil thickness across the width of the line.

Available in the following sizes:

1302	1702	2112	2712	3512
1304	1704	2308	2908	3908
1308	1708	2312	2912	3912
1502	1904	2508	3108	4308
1504	1908	2512	3112	4312
1508	2108	2708	3508	

- Heavy duty reversible tip.
- Pressure rated to 7700 psi.

Available in the following orifice sizes:

117	217	517	525	533
119	219	519	527	535
	221	521	529	539
123	223	523	531	

- Precision machined from the highest quality Tungsten Carbide.
- Available in sizes from .007- .072.
- Gasket not included.

Available in the following orifice sizes: (numerous fan widths available)

007	015	023	031	052
009	017	025	033	062
011	019	027	035	072
013	021	029	037	

- Fully adjustable fan widths from 2" to 24" reduce overspray.
- Perfect when changing from spraying walls to gutting in for trim work or around windows.
- Self-cleaning feature eliminates costly downtime due to clogs.

Product Number	Orifice Range	
341-015	.005-.018	Lacquer & Stain
341-020	.007-.019	Lacquer & Stain
341-024	.007-.026	Lacquer & Enamals
341-028	.011-.026	Lacquer & Enamals
341-041	.017-.035	High Builds
341-049	.021-.054	Very heavy

Handwriting practice lines on a page with a large, faint, stylized 'S' graphic on the left side.

TITAN™

Advanced Performance. Total Reliability.

TITAN™**3****YEARS
GUARANTEE**

Tip Clean



Titan hopper

**Titan PUMPRUNNER**

PumpRunner optional for all High Rider units.

SC-6 Reversible Tip Guard	661-012
LX-80 ^{II} Gun w/SC-6 Tip	580-100
LX-80 ^{II} Gun, Tip & Hose Kit	580-050
Reel-EZ 40 cm Hose Reel for 30.5 m 1/4" hose	769-100
Reel-EZ 25 cm Hose Reel for 15.2 m 1/4" hose	769-200
15 cm Gun Extension	651-070
30 cm Gun Extension	651-071
46 cm Gun Extension	651-072
61 cm Gun Extension	651-073
90 cm Extension Pole	310-383-1
180 cm Extension Pole	310-386-1
Extension Pole Swivel	651-139
Spray/Roll Application Kit	310-110
Telescoping Pressure Roller Kit	310-950
1/4" x 15 m Airless Hose, 214 bar	316-505
3/16" x 1 m Airless Whip Hose	550-240
Extra Fine Gun Filter, Red	500-200-15
Fine Mesh Gun Filter, Yellow	500-200-10
Medium Mesh Gun Filter, White	500-200-06
Coarse Mesh Gun Filter, Green	500-200-03
Medium Mesh Manifold Filter	730-067
Small Inlet Screen (Rock Catcher)	700-805
Large Inlet Screen (Rock Catcher)	710-046
Piston Lube – 240 ml Bottle	314-480
Piston Lube – 120 ml Bottle	314-481
LS-10 Liquid Shield Plus – 1 l Bottle	314-482
LS-10 Liquid Shield Plus – 120 ml Bottle	314-483

Imported by

Distributed by

**International Sales
Titan Tool, Inc.**1770 Fernbrook Lane
Minneapolis, MN 55447international@titantool.com
Fax 1-201-405-7449

Advanced Performance. Total Reliability.

***Sold exclusively through
professional distributors***Visit us at: www.titantool.com/international

All information contained in this brochure is based on the latest information available at time of printing. Titan reserves the right to make changes at any time, without notice.

